


# SM-40KSM

40Watt Photovoltaic Module



High-efficiency photovoltaic module using multicrystalline solar cells

- This module is manufactured in ISO9001 certified factories.
- Certification and Standards : IEC61215 ed.2, IEC61730

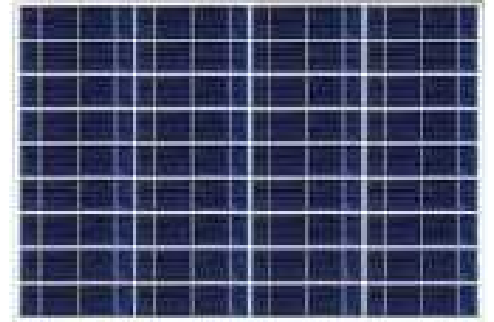


## Limited Warranty

- 2 year limited photovoltaic module warranty
- 20 year limited warranty on power output
- \*For detail, please refer to Warranty issued by Kyocera.


(Kyocera warrants that if photovoltaic module(s) exhibits power output of less than 90% of the original minimum rated power specified at the time of sale within 10 years and less than 80% within 20 years after the date of sale to the Customer. The power output values shall be those measured under Kyocera's Standard measurement conditions. Regarding the warranty conditions in detail, please refer to Warranty issued by Kyocera.)

## Electrical Characteristics

Current-Voltage characteristics of Photovoltaic Module SM-40KSM at various cell temperatures

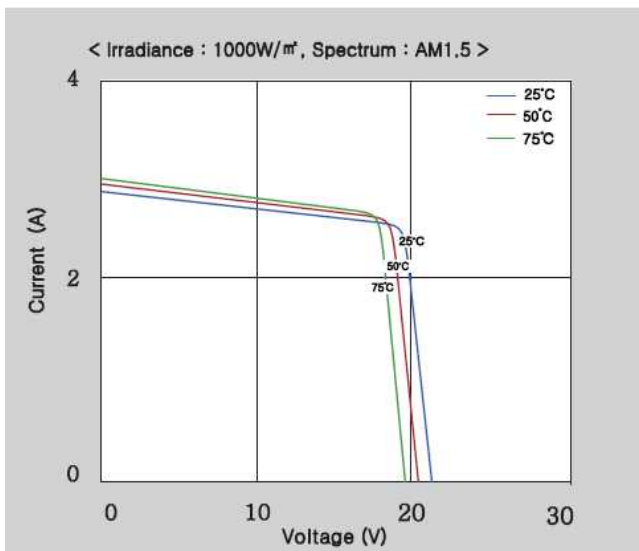


Current-Voltage characteristics of Photovoltaic Module SM-40KSM at various irradiance levels

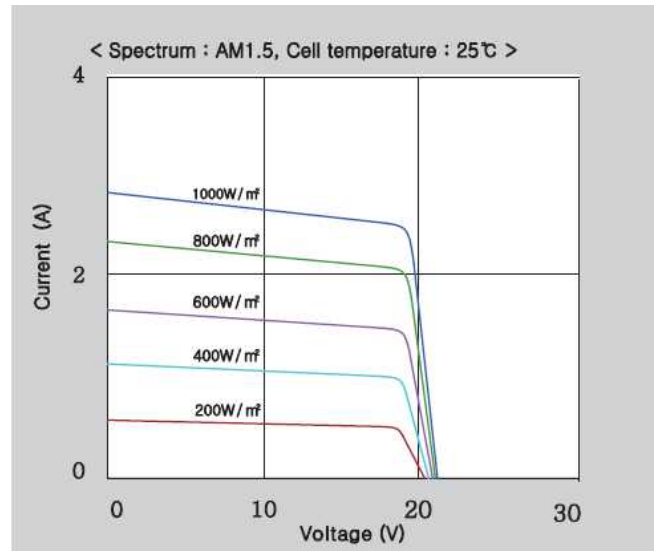

# SM-40KSM

High-efficiency photovoltaic module using multicrystalline solar cells

(unit: mm)

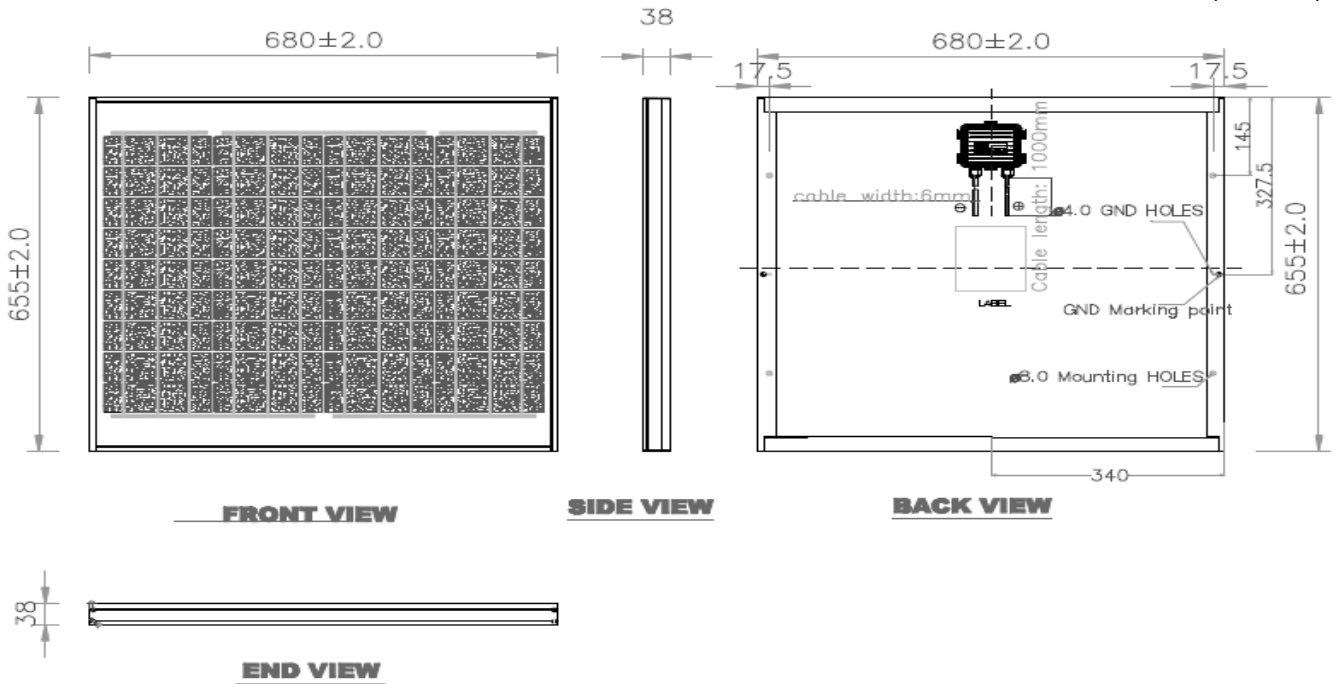

## Specifications

### Electrical Performance under Standard Test Conditions (\*STC)

Maximum Power (Pmax)	40W (+10%/-5%)
Maximum Power Voltage (Vpm)	17.8V
Maximum Power Current (Ipm)	2.25A
Open Circuit Voltage (Voc)	22.0V
Short Circuit Current (Isc)	2.77A
Max System Voltage	600VDC
Temperature Coefficient of Voc	$-0.70 \times 10^{-1}$ V/
Temperature Coefficient of Isc	$1.66 \times 10^{-3}$ A/

\*STC : Irradiance 1000W/m<sup>2</sup>, AM 1.5 spectrum, cell temperature 25

### Electrical Performance at 800W/m<sup>2</sup>, \*NOCT, AM1.5

Maximum Power (Pmax)	29W
Maximum Power Voltage (Vpm)	16.3V
Maximum Power Current (Ipm)	1.75A
Open Circuit Voltage (Voc)	20.3V
Short Circuit Current (Isc)	2.16A

\* NOCT(Nominal Operating Cell Temperature) : 47

### Module Characteristics

Number of Cells	36 cells
Cell Technology	Multicrystalline
Length X Width X Depth without Box	655 X 680 X 38 mm
Weight	5.3kg
Cable	1000mm (+/-)

### Junction Box Characteristics

Length X Width X Depth	98X100X25mm
IP Code	IP65

### Others

Series Fuse Rating	6A
--------------------	----

#### KYOCERA Solar Group Sales Office

KYOCERA Asia Pacific Pte. Ltd.

298 Tiong Bahru Road #13-03/05,  
Central Plaza, Singapore 168730  
[TEL] +65-6271-0500  
[FAX] +65-6271-0600  
[www.kyocera.com.sg](http://www.kyocera.com.sg)

KYOCERA Solar, Inc.

7812 East Acoma Drive, Scottsdale,  
AZ 85260, U.S.A.  
[TEL] +1-480-948-8003 or +1-800-223-9580  
[FAX] +1-480-483-6431  
[www.kyocerasolar.com](http://www.kyocerasolar.com)

KYOCERA Fin ceramics GmbH

Fritz-Mueller-Strasse 27,  
73730, Esslingen, Germany  
[TEL] +49-711-93934-999  
[FAX] +49-711-93934-950  
[www.kyocerasolar.eu](http://www.kyocerasolar.eu)

Manufactured by

S-ENERGY Co., Ltd

10<sup>th</sup> FL E&C Venture Dream  
Tower, 197-28 Guro-dong,  
Guro-gu, Seoul, Korea  
[www.s-energy.co.kr](http://www.s-energy.co.kr)

**NOTE :** This publication summarizes product warranty and specification, which are subject to change without notice